




*The RS is a rugged micro luminaire that provides the power and control of the halogen MR-16 lamp family. This precision lighting instrument is a fine example of engineering for simplicity and reliability. The RS is constructed without compromise using aerospace-grade alloys and silicone seals.*

### RS: Up Light

<b>MATERIALS:</b>	Zinc/aluminum alloy housing, shroud, and knuckle with stainless steel hardware
<b>SOCKET:</b>	MR16 GU5.3 socket with retaining clips
<b>WIRING:</b>	18 AWG SPT-1W 105° C 300V
<b>POWER:</b>	Input 10-15VAC/VDC 50/60Hz. Remote transformer required (sold separately)
<b>LAMP OPTIONS:</b>	No Lamp, LED lamp, ZD LED lamp, Halogen

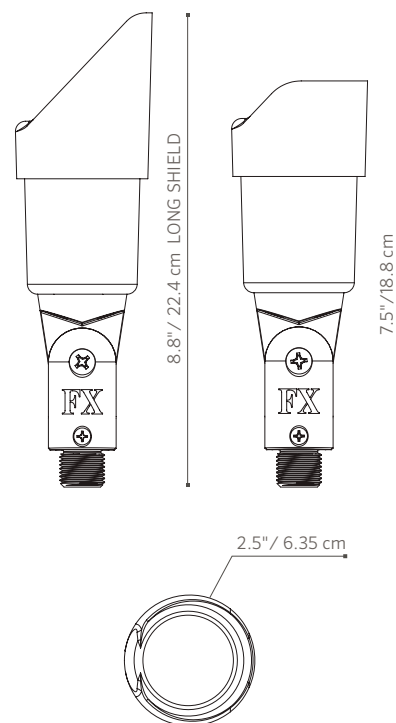



# RS: Up Light

< LONG SHIELD

**FACTORY INSTALLED OPTIONS:** Order 1 + 2 + 3 (optional) + 4 (optional) + 5

Step	Description	Code
1	FIXTURE	RS
2	LAMP	NL (No lamp), 20 (Halogen BAB), 35 (Halogen FMW), LED20WFL <sup>†</sup> (LED 4W BAB), LED35WFL <sup>†</sup> (LED 5W FMW), ZD35WFL <sup>†</sup> (ZD LED 5W FMW)
3	OPTIONAL FROSTED LENS	F
4	OPTIONAL SHIELD	LS ( <i>Long Shield</i> )
5	FINISH	WG, FW, AL, BZ, DG, WI, SB, FB

**EXAMPLE:** RS-35-LS-SB = RS - 35 Watt Halogen - Long Shield - Sedona Brown Finish

<sup>†</sup> LED lamps available only with BZ/FB finishes and clear lenses.

**POWDER COAT**

	WG = White Gloss
	FW = Flat White
	AL = Almond
	BZ = Bronze Metallic
	DG = Desert Granite
	WI = Weathered Iron
	SB = Sedona Brown
	FB = Flat Black

**FIELD INSTALLED OPTIONS:** Order Individually

Glare Control	Mounts							
<b>Hex Baffle</b> (250015260000)	<b>Super Slot Spike</b> (753900) 2" x 7" Included ▼				<b>Coupling: Straight</b> (COUP-XX) 1.3" x 2.0"			
<b>RecessorRing</b> (RRMR16)	<b>Long Slot Spike</b> (250015840000) 2.5" x 10"				<b>Coupling: 90° Elbow</b> (ELBW-050-XX**) 1.3" x 2.0"			
	<b>SuperJ-Box</b> (SJ-XX**) 2.5" x 12"				<b>Coupling: T-Mount</b> (TMNT-050-XX**) 3.0" x 2.2"			
	<b>Post Mount</b> (PM-XX**) 2.5" x 13"				<b>Gutter Mount</b> (GM-SS) 4.0" x 4.0"			
<b>Lenses/Filters</b>								
<b>Frosted</b> (250015170000)	<b>Super Slot Spike</b>	<b>Long Slot Spike</b>	<b>Super J-Box XX**</b>	<b>Post Mount XX**</b>	<b>Coupling: Straight</b>	<b>Coupling: 90° Elbow</b>	<b>Coupling: T-Mount</b>	<b>Gutter Mount</b>
<b>Spread</b> (250013550000)	<b>Tree Box</b> (TB-XX) 5.4" x 1.9"				<b>Sign Light Riser</b> (YY-R-SL-XX**) 0.8" diameter w/45° inward curve			
<b>Solite Spread</b> (250015240000)	<b>Wall Plate: 1-Gang</b> (WP-1G-050-XX**) 3.4" x 5.1"				<b>Straight Riser</b> (YY-R-XX**) 0.8" diameter			
<b>Dichroic Peach</b> (250015230000)	<b>Wall Plate: Round</b> (WP-RD-050-XX**) 5.0" diameter							
<b>Dichroic Blue</b> (250015200000)								
<b>Dichroic Green</b> (250015210000)	Tree Box	Wall Plates: 1-Gang	Wall Plates: Round		Sign Light Riser	Straight Riser		
<b>Dichroic Red</b> (250015220000)								
<b>Light Blue</b> (250015190000)								

The RS includes choice of halogen MR-16 lamp, frosted or clear lens, choice of finish, and a Super Slot Spike.

\*\* Denotes finish code



**EXAMPLE:** RRMR16 = ReccessorRing  
PM-SB = Post Mount - Sedona Brown Finish