

### LANCER 6: 12V & 24V Brass Area Light

|                 |  |
|-----------------|--|
| PROJECT:        |  |
| TYPE:           |  |
| CATALOG NUMBER: |  |
| LAMP(S):        |  |
| NOTES:          |  |

## FIXTURE ORDERING INFORMATION

Example: L6-12-L2 (Lancer 6, 12 Volt, 2 Watt, 3000K LED T3, 25' Wire Lead, Weathered Brass)

| MODEL NAME          | VOLTAGE    | WATTAGE            | WIRE LENGTH                         | FINISH  | OPTIONS        |
|---------------------|------------|--------------------|-------------------------------------|---|----------------|
| L6= (Std.) 18" stem | 12=12 Volt | L1= LED, 1W, 3000K | Leave blank for standard 25' length | leave blank for standard WB finish                  | * 6P= Six Pack |
| *L612= 12" stem     | 24=24 Volt | L2= LED, 2W, 3000K | * 0= 3' wire lead                   | P= Standard powder coat finishes.                   |                |
| *L624= 24" stem     |            | 20= 20W Xelogen    | * 50= 50' wire lead                 | List your desired color in the order comments area. |                |
| *L636= 36" stem     |            | NL= No Lamp        |                                     |   |                |
| *L648= 48" stem     |            |                    |                                     |   |                |

**NOTE:** Pre-lamped LED fixtures are NOT available with 24V lamps. LED fixtures and six pack options are available ONLY with a 25' wire lead. For additional painted finishes or six pack options contact our factory.

#### Powder Coated Finishes


|                 |    |
|-----------------|----|
| Tucson Tan      | TT |
| White           | WH |
| Black           | BK |
| Verde Green     | VG |
| Titanium Knight | TK |

#### Standard Finish

|                 |    |
|-----------------|----|
| Weathered Brass | WB |
|-----------------|----|

Stock powder coated colors displayed are subject to varying lead-times and will incur an additional cost. A Limited Warranty applies to all powder coated products. Custom colors are available upon request. Please inquire about cost and lead times. Contact factory for custom colors and matching paint options.

## DIMENSIONS:

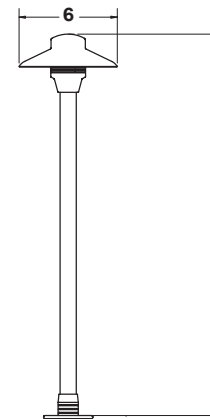

L6= (Std.) 21" Overall height  
L612= 15" Overall height  
L624= 27" Overall height  
L636= 39" Overall height  
L648= 51" Overall height

**FLEX™** Unique Lighting Systems® fixtures are available with LED lamps. Please specify the lamp code when ordering.

\* Only available with the NL wattage option. Unique Lighting Systems® reserves the right to modify the design and/or construction of the fixture shown without further notification.

## SPECIFICATIONS

### Our Commitment

Unique Lighting Systems' highest commitment is to set the standard for manufacturing innovative and quality products. This commitment is evident through our detailed inspection processes and extensive field testing. From the initial design process of each product, to the final assembly of each custom-made individual part, our manufacturing process accomplishes the highest level of performance and durability carried through to final delivery to the end user. Durable construction and beautiful styling make Unique fixtures the ideal solution for any residential or commercial application. Unique Lighting™ already holds numerous product patents and we are constantly developing innovative ideas to help expand the lighting industry.

### Materials

Crafted from extruded and machined brass.

### Stem

Brass unibody design provides enclosed, water resistant wireway.

### Collar

Machined brass with threaded height adjustment.

### Shroud

Stamped brass. Reflective Powder Coat Interior.

### Lens

Shock resistant, frosted Borosilicate Glass lens.

### Lamp

For use with a Xelogen lamp up to 20W. **FLEX™** Series LED lamps are available in 1W or 2W T3 lamps. LED lamps are available in 3000K color temperatures.

### Electrical Requirements

A remote 12V or 24V transformer required, may be ordered separately from Unique Lighting Systems®. Voltage range for 12V halogen lamps is 10.8V to 12V. Voltage range for 24V halogen lamps is 21.6V to 24V. Voltage range for 12V **FLEX™** Series LED lamps is 10V-18V.

### Socket

Specification grade, beryllium copper lamp holder. GU5.3 base.

### Wiring

Exclusive UF Intelli-Flex wire with anti-moisture migration connections.

### Mounting Stake

Standard mounting stake is injection molded PVC with a ½" NPS threaded female fitting.

### Finish

Exclusive Weathered Brass finish is standard. Unique™ Lightings' Weathered Brass finish is a "living finish" and will naturally patina and change over time. Polyester powder coat finishes are also available (see chart above).

### Warranty

The Brass Knights Family of products from Unique Lighting Systems® carries a limited 15 year warranty against manufacturer's defects.

### Manufacturing

Manufactured to ISO 9001-2008 Quality standard.



UL 2108:2004 R12.07  
CSA C22.2.9.0-96 (R2006)